

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
4 December 2003 (04.12.2003)


PCT

(10) International Publication Number
WO 03/100218 A1

- (51) International Patent Classification⁷: **E21B 47/06**, 47/01, 49/10
- (21) International Application Number: **PCT/EP03/50102**
- (22) International Filing Date: **10 April 2003 (10.04.2003)**
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data:
0209350.8 **24 April 2002 (24.04.2002)** **GB**
- (71) Applicant (for FR only): **SERVICES PETROLIERS SCHLUMBERGER [FR/FR]**; 42 rue Saint Dominique, F-75007 Paris (FR).
- (71) Applicant (for JP, NL only): **SCHLUMBERGER HOLDINGS LIMITED [—/—]**; PO BOX 71, Craigmuir Chambers Road Town (VG).
- (71) Applicant (for CA, GB only): **SCHLUMBERGER CANADA LIMITED [CA/CA]**; 24th Floor - Monenco Place, 801 6th Avenue SW, Calgary, Alberta T2P 3W2 (CA).
- (71) Applicant (for BF, BJ, CF, CG, CI, CM, CZ, GA, GN, GQ, GW, IN, LT, MA, ML, MR, NE, SN, TD, TG, TN, VN only): **PETROLEUM RESEARCH & DEVELOPMENT N.V. [NL/NL]**; De Ruyterkade 26, Willemstad, Curacao (AN).
- (71) Applicant (for AE, AG, AL, AM, AT, AU, AZ, BA, BB, BE, BG, BR, BY, BZ, CH, CN, CO, CR, CU, CY, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GD, GE, GH, GM, GR, HR, HU, ID, IE, IL, IS, IT, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LU, LV, MC, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PH, PL, PT, RO, RU, SC, SD, SE, SG, SI, SK, SL, SZ, TJ, TM, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW only): **SCHLUMBERGER TECHNOLOGY B.V. [NL/NL]**; Parkstraat 83-89, NL-2514 JG The Hague (NL).

[Continued on next page]

(54) Title: **DEPLOYMENT OF UNDERGROUND SENSORS**

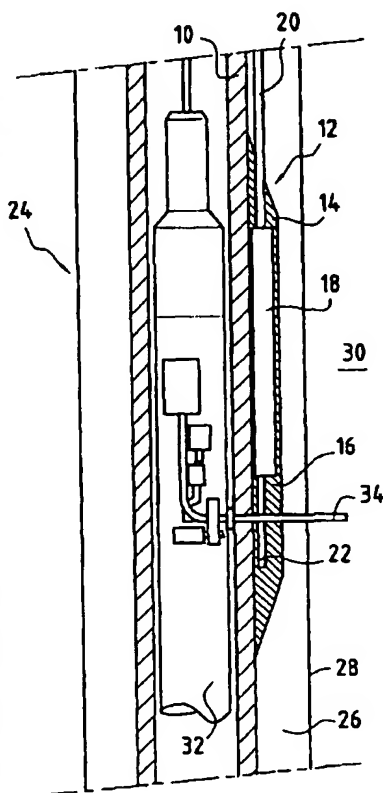

(57) Abstract: A method of installing a sensor located in a chamber on the outside of a casing, comprising the steps of positioning the casing in a well, cementing the casing in position, positioning a drilling tool inside the casing level with the chamber, drilling through the casing, chamber and cement into the formation surrounding the well so as to create a fluid communication path, and sealing the hole drilled in the casing.

WO 03/100218 A1



- (71) Applicant (*for CN only*): **SCHLUMBERGER OVERSEAS S.A.** [PA/PA]; 8 Calle Aquilino de la Guardia, Panama City (PA).
- (71) Applicant (*for OM, SD, TR only*): **SCHLUMBERGER OILFIELD ASSISTANCE LIMITED** [PA/PA]; 8 Calle Aquilino de la Guardia, Panama City (PA).
- (71) Applicant (*for BR only*): **SCHLUMBERGER SURENCO S.A.** [PA/PA]; 8 Calle Aquilino de la Guardia, Panama City (PA).
- (71) Applicant (*for TT only*): **SCHLUMBERGER SERVICES LIMITED** [—/—]; PO BOX 438, Tortola (VG).
- (72) Inventors; and
- (75) Inventors/Applicants (*for US only*): **EDWARDS, John** [NZ/OM]; C/O Schlumberger Oilfield Services, PO Box 2548, Postal Code 112, Ruwi (OM). **GAMBIER, Philippe** [FR/US]; c/o Schlumberger Reservoir Completions, 14910 Airline Road, Rosharon, TX 77583 (US). **TOURILLON, Vincent** [FR/CA]; C/O Schlumberger, 7605 - 50 Street, Edmonton, Alberta T6B 2W9 (CA). **CHOUZENOUX, Christian** [FR/FR]; 33, Rue Du Mont Valerien, F-92210 St. Cloud (FR). **RIOUFOL, Emmanuel** [FR/US]; c/o Schlumberger Reservoir Completions, P. O. Box 1590, Rosharon, TX 77583-1590 (US).
- (74) Agent: **HYDEN, Martin**; ETUDES ET PRODUCTIONS SCHLUMBERGER, PROPRIETE INTELLECTUELLE, 1, rue Henri Becquerel, BP 202, F-92142 CLAMART Cedex (FR).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

DEPLOYMENT OF UNDERGROUND SENSORS

The present invention relates to methods of deploying underground sensors and to systems and apparatus utilizing underground sensors. In particular, the invention relates to such methods, systems and apparatus for making underground pressure measurements

This invention is particularly concerned with the measurement of the pressure of fluids in formations surrounding a borehole such as an oil, water or gas well. formation pressure measurement is one of the basic measurements made on a formation to determine the properties of an underground reservoir, particularly a hydrocarbon reservoir. When a well is first drilled, it is relatively easy to make such a measurement by placing a probe in contact with the borehole wall and using the probe to sense the pressure of fluids in the formation. Such a measurement can be made by the MDT tool of Schlumberger. The MDT tool is lowered into the well in question and a hollow probe extended into contact with the borehole wall. The probe is connected to an accurate pressure gauge which allows the pressure of the fluids in the formation at that location to be determined. Such measurements are made at different locations in the well to provide formation pressure measurements along the sections of interest.

Measurements such as those made by the MDT tool can be characterized as open-hole, wireline measurements. That is, they are made just after the well has been drilled, and are made by means of a tool that is lowered into the well by means of a wireline cable and logged through the well on this cable and removed from the well when the measurements are completed. Tools such as the MDT tool are relatively large and expensive so cannot be left in the well for any period of time.

Once a well has been drilled, it is typically completed by installing a liner or casing into the well. Normally this casing is made of steel and is fixed into the well by cement that is placed in the annulus between the outer surface of the casing and the borehole wall. Completion of the well in this manner serves a number of purposes. The cement and casing provide physical support to the well to prevent it collapsing or becoming eroded by flowing fluids. The cement also provides isolation between the

various zones of the formation penetrated by the borehole so as to prevent fluid communication between these zones of the formation which might inhibit production of desired fluids such as oil, and the cement and casing prevent the ingress of undesirable fluids, such as water in an oil well, that can dilute useful production or require the use of expensive and complex surface equipment to separate oil and water. While the benefits of completion in this manner are well known, it does mean that it is not possible to obtain easy access to the formation for making pressure measurements after the completion has been installed.

Various approaches have been proposed to enable measurements to be made on formations after a well has been completed in the manner described above.

In US 6,234,257 and US 6,070,662 a sensor is disposed inside a shell which is forced into the formation. This can be achieved by the use of an explosive charge while the well is being drilled. The sensor can then be interrogated for an extended period after the drilling is finished by means of an antenna which can communicate through an aperture provided in the casing.

SPE 72371 describes a tool (the CHDT tool of Schlumberger) which allows pressure testing of the formation after completion of the well. The tool drills a hole through the casing and cement into the formation and a probe is placed over the hole to sense the formation pressure and take samples of formation fluid if required. Once the measurement is complete, a plug or rivet is placed in the hole in the casing, sealed and pressure tested to confirm the integrity of the casing.

It has been proposed to install permanent sensors on the outside of the casing to allow long term monitoring of formation pressure. However, since cement is usually impermeable, it would be necessary to provide some means of fluid communication between the formation and the sensor in order that pressure can be measured. One proposal has been to mount the sensor in a chamber on the outside of the casing that also carried an explosive charge. After installation and cementing, the charge is fired to provide a communication path into the formation. This approach is not preferred in many cases since it requires the use of explosive charges which brings with it safety considerations and extensive complexity for controlling the firing of the charge. The

damage caused by the charge might be sufficient to damage the sensor too. Another potential problem is that since the perforation tunnel is not open to the well, fluid does not flow through the perforation and allow cleaning of residues. Therefore there is now way to ensure that there is good fluid communication between the formation and the sensor. Since the charge is mounted on the outside of the casing, it may be necessary to use a smaller casing size than normal to fit into the borehole. Further details of this approach can be found in US 5,467,823.

Other methods of installing permanent sensors that allows communication with the formation relies on the use of non-cemented casing or liners.

The present invention attempts to provide method and systems for deploying sensors in communication with underground formations.

In accordance with the present invention, there is provided a method of installing a sensor located in a carrier on the outside of a casing, comprising the steps of positioning the casing in a well, cementing the casing in position, positioning a drilling tool inside the casing level with the carrier, drilling through the casing, carrier and cement into the formation surrounding the well so as to create a fluid communication path, and sealing the hole drilled in the casing.

The drilling and sealing operations are preferably performed using a tool such as the CHDT tool of Schlumberger. In order to ensure good fluid communication between the formation and the chamber, the tool can be used to create a drawdown across the drilled hole to produce reservoir fluid through the hole and clean it of debris and skin damage.

The carrier can comprise a permeable support in which the sensor is encapsulated, a hollow chamber in which the sensor is mounted, or combinations of these approaches.

A particularly preferred installation has the sensor mounted at one end of an elongate chamber. The hole is drilled through the chamber at a point remote from the location of the sensor to avoid damaging the sensor. In order to ensure good fluid communication with the sensor, a buffer tube can be installed in the chamber which

extends to the sensor. The hole is drilled through the buffer tube as well as the chamber in this case. Alternatively, the chamber can be filled with a permeable material such as a permeable cement or sintered metal to allow fluid communication with the sensor.

Where the sensor is encapsulated in the carrier, the permeable material can comprise permeable cement, sintered metal or other such materials.

Means are preferably provided to allow the drilling and plugging tool to be positioned inside the casing accurately relative to the chamber through which it is to drill. One such approach is the Indexing Casing Coupling system of Schlumberger. In such a system, a specific profile is provided inside the casing to identify a given depth and an orientation profile is provided for a given orientation inside the casing. Corresponding depth and orientation keys are provided on a landing tool which is lowered into the well such that it can be positioned relatively accurately at a given depth and orientation allowing accurate drilling through the casing, chamber, cement and into the formation.

Another approach is to use the drilling tool to make a measurement on the formation surrounding the well, for example a gamma ray measurement, that allows the depth of the tool in the well to be determined relatively accurately from a knowledge of the depth of formation features.

A series of sensors can be installed by providing multiple sensors, each in a chamber on the outside of a respective casing.

Whether one or more sensors is installed, it is preferred to communicate data to the surface by means of a cable running along the outside of the casing in the well. This cable can provide power to the or each sensor.

When installing casing carrying sensors into the well which are to be connected to the surface by means of a cable, the casing can be rotated as it is inserted into the well such that the cable is wound in a spiral manner around the casing.

The cable running along the outside of the casing can be provided with regularly spaced standoffs which allow a space to be maintained between the cable and the outside of the casing. This in turn allows good cement placement around the cable.

The present invention will now be described by way of examples and in reference to the accompanying drawings, in which:

Figure 1 shows a schematic view of a drilling operation to connect a sensor to the formation;

Figure 2 shows a view of the casing with the hole plugged after drilling;

Figure 3 shows a cross-section through the casing on line AA of Figure 2;

Figure 4 shows a cross-section through the casing on line BB of Figure 2;

Figure 5 shows a detail of the casing with cable running along its outer surface;

Figures 6a and 6b show details of cable spacers;

Figure 7 shows a view of the installation of the cable at the surface; and

Figures 8 – 11 show another embodiment of the invention and correspond to Figures 1 – 4.

Referring now to the drawings, Figures 1 – 4 show a casing installed in a well. The casing 10 has an enlarged section 12 forming a carrier 14 in which a chamber 16 is defined. A pressure gauge 18 is located at one end of the chamber 16 and is connected to a data and power cable 20 and to a buffer tube 22 which is filled with a relatively incompressible liquid. The buffer tube 22 is flattened against an outer wall of the casing 10 in a flat bean shape covering an arc of the casing 10. An indexing device (not shown), such as an ICC profile, can be provided in the casing 10 above the carrier 14 and the distance from the indexing device to the buffer tube 22 measured with relative accuracy at the surface, before the casing is installed in the well.

The casing 10 forms part of an extended casing completion (not shown) which is run into the well 24 in the manner described below. Once installed in the well 24, cement 26 is placed in the annulus between the outside of the casing 10 and the borehole wall 28 and allowed to set to provide support for the casing 10 and borehole wall 28 and zonal isolation of the formations penetrated by the well. Thus it will be appreciated that the cement 26 is impermeable and allows no fluid communication between the formation 30 and the surrounding environment.

A drilling tool 32 such as the CHDT, is run into the casing 10 after the cement 26 has set by means of a wireline cable (not shown) and is lowered until an indexing tool (not shown) reaches the indexing device described above. The tool 32 is positioned at a predetermined distance below the indexing tool so that when the indexing tool is positioned in the indexing device, the tool 32 is positioned adjacent the buffer tube 22.

In cases where the tool 32 also includes a gamma ray or other such measurement, it is possible to determine the position of the tool in the well using a knowledge of the depths of the formations surrounding the well as a guide. This can help compensate for any casing depth inaccuracies. In such a case, the chamber 16 is preferably of a length sufficient to accommodate casing depth errors, for example 10ft for a well depth of 10,000ft.

The tool 32 is then operated to drill through the casing 19, buffer tube 22, chamber 16, cement 26 and into the formation 30. Once the hole is drilled, the drill 34 is withdrawn and, if desired, a drawdown can be create across the drilled hole 36 to produce formation fluid and clean the hole of debris or skin damage. With the tool in place, it is also possible to make a direct measurement of the formation pressure for comparison with that from the installed sensor or as a calibration.

The hole in the casing 10 is then plugged with a rivet 38 which is pressure tested to ensure that no fluid can flow into the casing 10 at this point. The tool 32 can then be moved to another location to perform a similar drilling and plugging operation, or removed from the well completely.

The drilling and plugging operation can be repeated over time to avoid problems due to the original hole becoming plugged and to provide further direct measurements of the formation pressure to correct for sensor drift or to recalibrate the measurements.

As an alternative to the buffer tube arrangement described above, the chamber 16 can be filled with a permeable material, for example a permeable cement. This allows the pressure gauge 18 to be in fluid communication with the formation directly and means

that it is not so important to arrange that the drill pass through a buffer tube to ensure this.

While Figures 1 – 4 show a single cable 20 running from the pressure gauge 18, it will be appreciated that where multiple gauges are installed in a single well, the cable will need to be connected to each of these. A typical round section cable running along the casing can potentially lead to problems with cement integrity if it lies against the outside of the casing. In particular, the dimensions and shape of the cable can be such that it is not possible to get good cement placement all around the cable, leaving fluid paths running along the casing and compromising the ability of the cement to provide good zonal isolation. The present invention proposes a solution to this problem, as shown in Figure 5, which comprises providing a number of spacers 40 positioned along the cable 20. These spacers ensure that there is sufficient space between the cable 20 and the casing 10 to allow good cement placement and so avoid the zonal isolation problems identified above. Alternative forms of spacers 40 are shown in Figures 6a and 6b. In Figure 6a, each spacer 40 is formed from a pair of semicircular parts 42, 44 which are mounted on the cable 20 around its outer surface. In Figure 6b, the spacer is formed from four fins 46 spaced equally around the cable 20. These arrangements are preferred but other, similar arrangements might also serve the same objective of spacing the cable from the casing to allow good cement placement.

Figure 7 shows, schematically, one manner of installing the casing and cable into the well. The casing 10 is added one element at a time, in the conventional manner, from a rig 50. Couplers 54 and centralisers 56 can be located at the joints between casing elements. At the same time, the cable 20 is wound around the casing 10 in a spiral fashion from a spooler 52, by rotating the casing as it is lowered into the well. A single cable 20 is shown here, but more than one can be used if required. By winding the cable around the casing in this manner, cement flow around the casing is eased and better cement placement achieved. Also, problems with displacing the cable from the casing are reduced. Such an approach might be used for only part of the completion, a straight run of cabling being used where the casing is to be perforated (to ensure that the position of the cable is known and that the perforation operation does not cut the cable). The pitch of the winding can be varied to suit requirements but may typically be in the range of 1 – 5 turns per 10 meters.

In the embodiment shown in Figures 8 – 11 corresponding features to those of Figures 1 – 4 are given corresponding numbers in the 100 series. In this embodiment, the sensor 118 is positioned in a carrier 114 that is formed from a permeable material such as permeable cement or sintered metal. There is no chamber or buffer tube in this case.

Various changes can be made in the embodiments described above without departing from the inventive concepts disclosed herein.

CLAIMS

- 1 A method of installing a sensor located in a carrier on the outside of a casing, comprising the steps of positioning the casing in a well, cementing the casing in position, positioning a drilling tool inside the casing level with the carrier, drilling through the casing, carrier and cement into the formation surrounding the well so as to create a fluid communication path, and sealing the hole drilled in the casing.
- 2 A method as claimed in claim 1, wherein the drilling and sealing operations are preferably performed using a tool that is run into the well so as to be positioned adjacent the carrier, the tool being removed from the well after the drilling and sealing operations are completed.
- 3 A method as claimed in claim 2, wherein the tool is used to create a drawdown across the drilled hole to produce reservoir fluid through the hole and clean it of debris and skin damage.
- 4 A method as claimed in claim 3, further comprising making a direct measurement of formation pressure prior to sealing the hole.
- 5 A method as claimed in any preceding claim, wherein the drilling and sealing operations are repeated at intervals throughout the life of the well.
- 6 A method as claimed in any preceding claim, wherein the sensor is mounted in a chamber in the carrier.
- 7 A method as claimed in claim 6, wherein the sensor is mounted at one end of an elongate chamber, the hole being drilled through the chamber at a point remote from the location of the sensor.
- 8 A method as claimed in claim 6 or 7, wherein a buffer tube is installed in the chamber which extends to the sensor, the hole being drilled through the buffer tube as well as the chamber.

- 9 A method as claimed in claim 6, 7 or 8 wherein the chamber is be filled with a permeable material such as a permeable cement or sintered metal, the hole being drilled through the permeable material.
- 10 A method as claimed in any of claims 1 to 5, wherein the carrier comprises a permeable material encapsulating the sensor.
- 11 A method as claimed in any preceding claim, comprising positioning the drilling and plugging tool inside the casing relative to the chamber through which it is to drill using an indexing system located inside the casing.
- 12 A method as claimed in claim 11, further comprising using a measurement of formation properties to indicate the depth of the tool in the well.
- 13 A method as claimed in any preceding claim, wherein a series of sensors are installed, each in a separate chamber on the outside of a respective casing.
- 14 A method as claimed in any preceding claim, further comprising running a cable along the outside of the casing in the well from the or each sensor to the surface.
- 15 A method as claimed in claim 14, wherein when installing the casing carrying sensors into the well, the casing can be rotated as it is inserted into the well such that the cable is wound in a spiral manner around the casing.
- 16 A method as claimed in claim 14 or 15, comprising providing regularly spaced spacers on the cable which allow a space to be maintained between the cable and the outside of the casing.

1/3

FIG.1

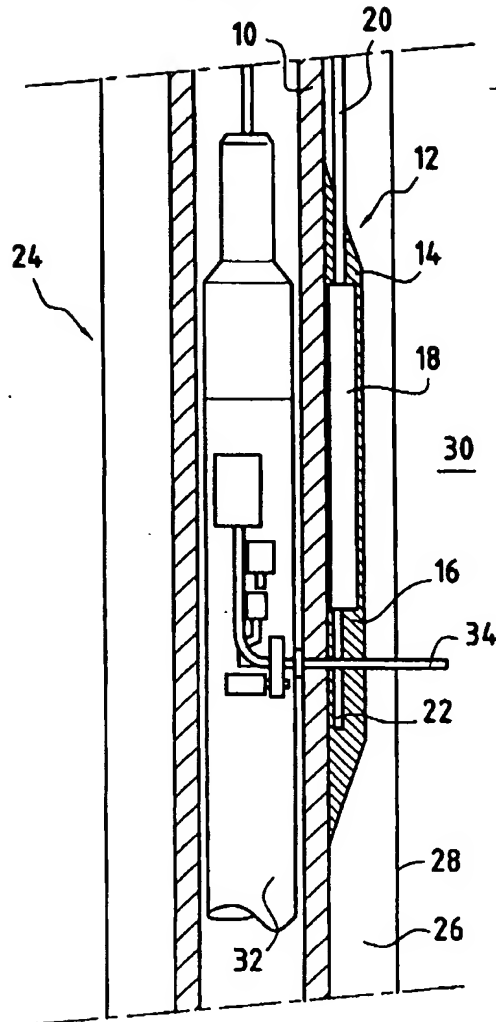


FIG.2


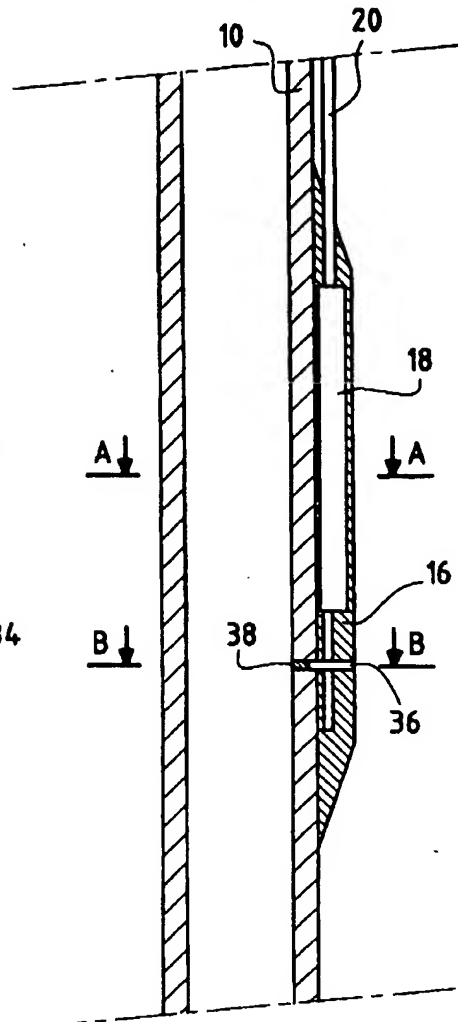


FIG.3







FIG.4

2/3

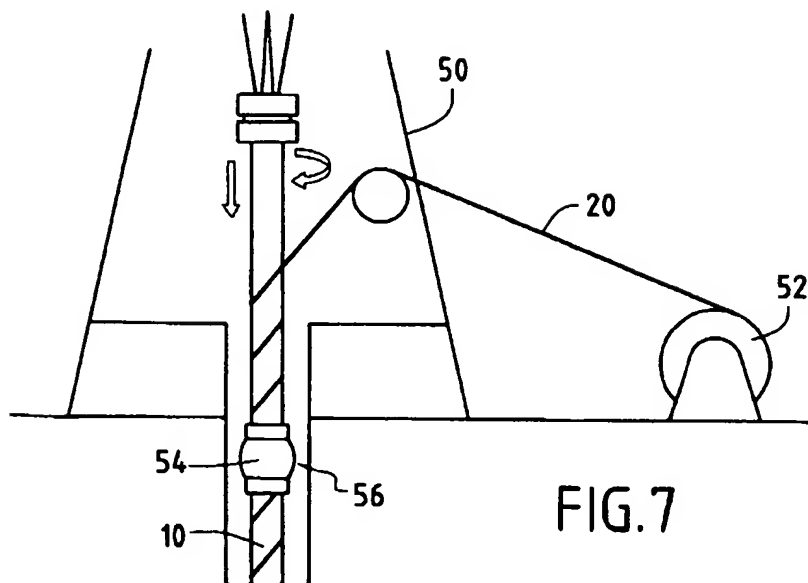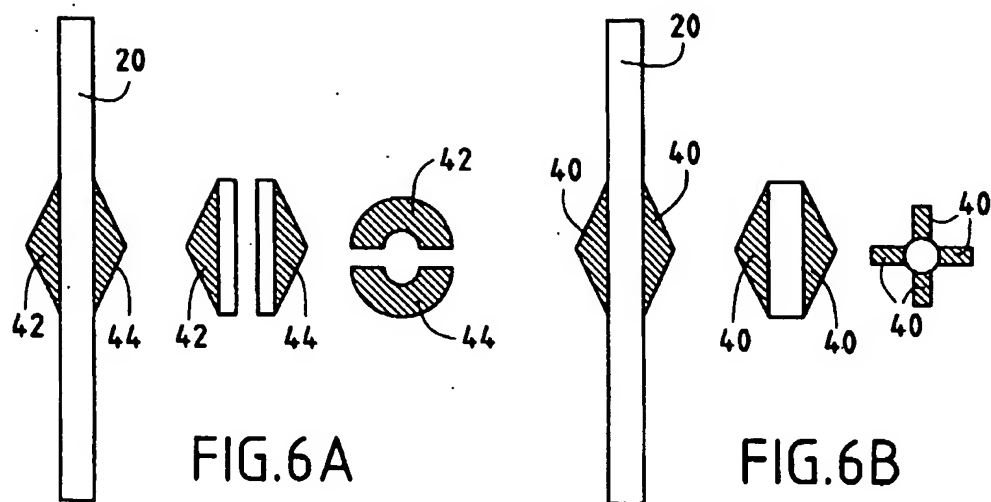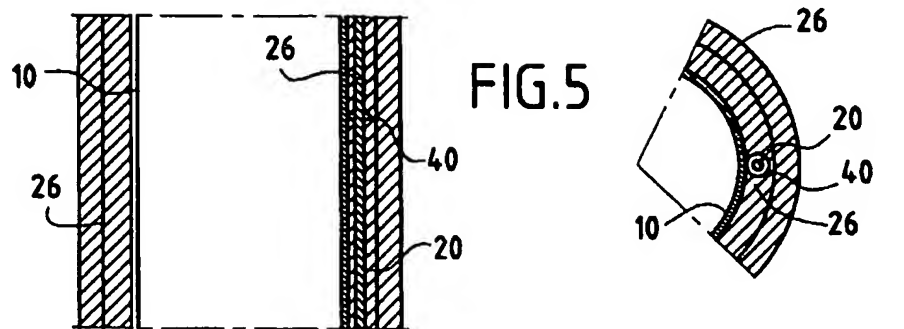

3/3

FIG.8

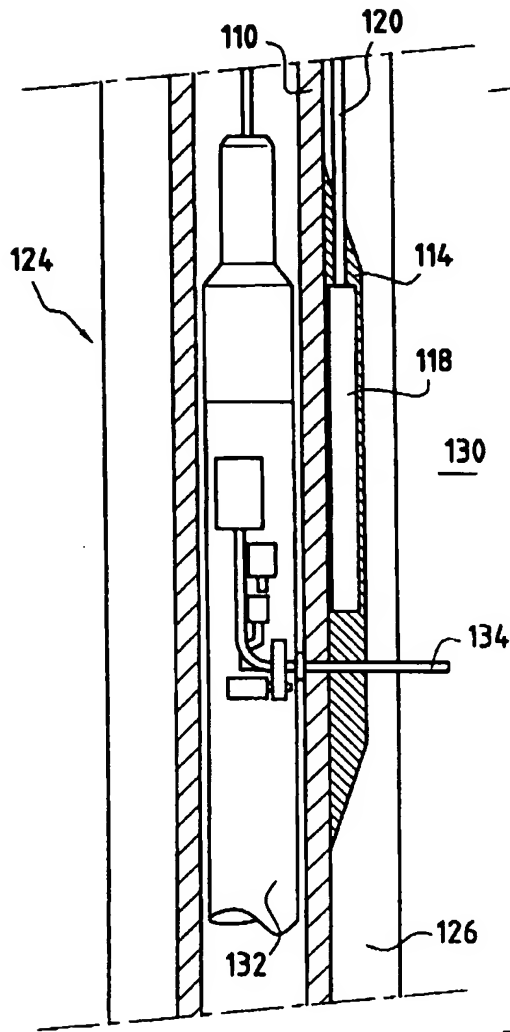


FIG.9


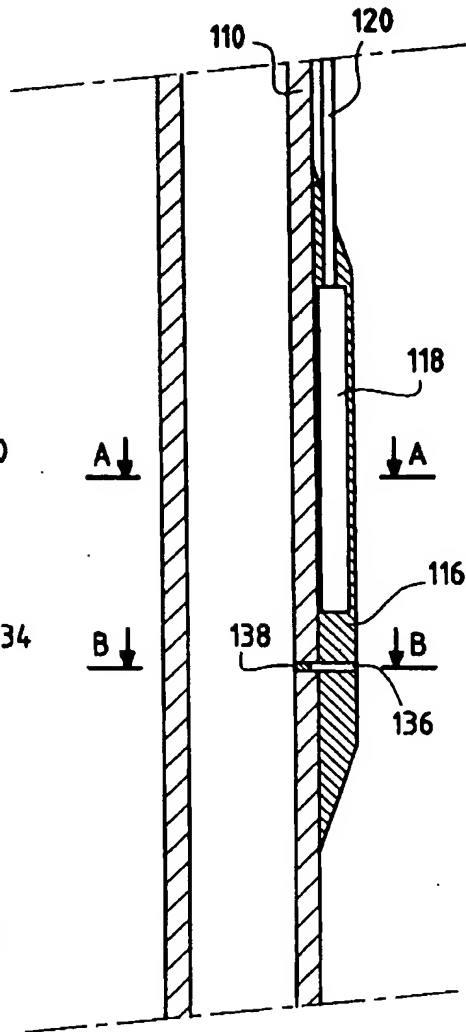


FIG.10




FIG.11

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 03/50102

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 E21B47/06 E21B47/01 E21B49/10

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 E21B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 984 135 A (SCHLUMBERGER SERVICES PETROL ; SCHLUMBERGER HOLDINGS (VG)) 8 March 2000 (2000-03-08) cited in the application abstract figures 1,2,7 ---	1
A	EP 0 994 238 A (SCHLUMBERGER SERVICES PETROL ; SCHLUMBERGER HOLDINGS (VG)) 19 April 2000 (2000-04-19) abstract ---	1
A	US 5 765 637 A (DIETLE LANNIE ET AL) 16 June 1998 (1998-06-16) abstract --- -/--	1

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- *&* document member of the same patent family

Date of the actual completion of the international search

25 July 2003

Date of mailing of the international search report

01/08/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040. Tx. 31 651 epo nl.
Fax: (+31-70) 340-3016

Authorized officer

Schouten, A

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 03/50102

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>EP 0 791 723 A (SCHLUMBERGER SERVICES PETROL ;SCHLUMBERGER TECHNOLOGY BV (NL); SCH) 27 August 1997 (1997-08-27) abstract</p> <p>-----</p>	1

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 03/50102

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0984135	A	08-03-2000	US 6070662 A	06-06-2000
			AU 758816 B2	03-04-2003
			AU 4015399 A	09-03-2000
			BR 9903775 A	09-10-2001
			CN 1249392 A	05-04-2000
			EP 0984135 A2	08-03-2000
			NO 993947 A	21-02-2000
			RU 2169837 C2	27-06-2001
			US 2002149498 A1	17-10-2002
			US 2002171560 A1	21-11-2002
			US 2003058125 A1	27-03-2003
			US 6426917 B1	30-07-2002
EP 0994238	A	19-04-2000	US 6164126 A	26-12-2000
			AU 756138 B2	02-01-2003
			AU 5019699 A	20-04-2000
			BR 9904424 A	05-09-2000
			CN 1251408 A	26-04-2000
			EP 0994238 A2	19-04-2000
			NO 994994 A	17-04-2000
			RU 2178525 C2	20-01-2002
US 5765637	A	16-06-1998	NONE	
EP 0791723	A	27-08-1997	US 5692565 A	02-12-1997
			AU 720235 B2	25-05-2000
			AU 1479597 A	28-08-1997
			CA 2197962 A1	21-08-1997
			EP 0791723 A1	27-08-1997
			NO 970769 A	21-08-1997

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ ~~FADED~~ TEXT OR DRAWING
- ☐ ~~BLURRED~~ OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ ~~LINES~~ OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.